



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 0600

ISSUED: 1-87

REVISED: 3-99

INTER-LOK STAINLESS STEEL FRAMED MIRROR

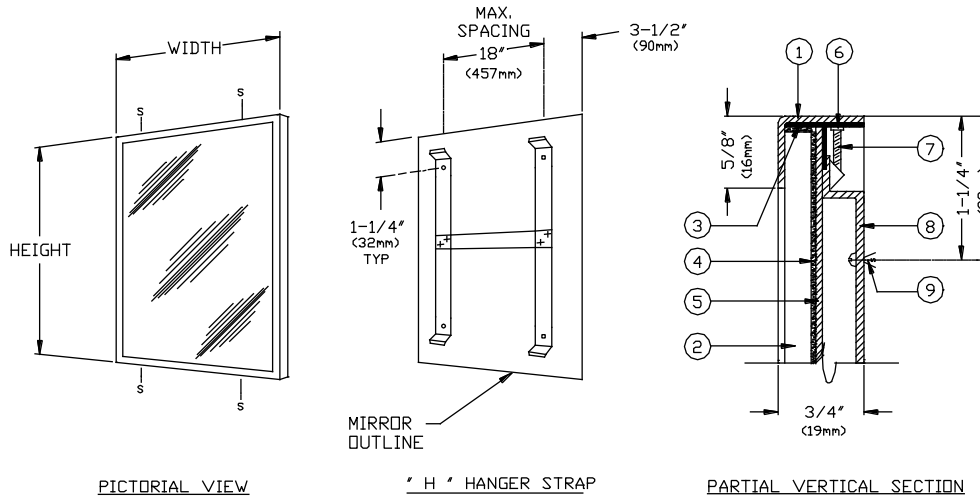

DESCRIPTION

- | | |
|--|---|
| 1. 18 GAUGE STAINLESS STEEL FRAME | 6. MOUNTING NUT |
| 2. 1/4" (6mm) PLATE GLASS MIRROR | 7. TAMPER RESISTANT MOUNTING & LOCKING SCREWS 10-32 X 1-1/4" (32mm) |
| 3. SHOCK-ABSORBING EDGE CUSHION | 8. HANGER BRACKET- 18 GAUGE STEEL |
| 4. NON-ABSORBENT FILLER | 9. INSTALLATION SCREW-FURNISHED BY INSTALLER |
| 5. 20 GAUGE CORROSION PROTECTED STEEL BACK | |

SPECIFICATION

Inter-Lok Stainless Steel Framed Mirror shall have frame fabricated of alloy 18-8 stainless steel, type 304 N^o 18 gauge with mitred corners welded and polished. All exposed surfaces shall be N^o 4 satin finish. Mirror glazing shall be ____ (insert glazing option) and shall be warranted for 15 years against silver spoilage. All edges of mirror shall be protected with friction and chafe absorbing fillers. Back of mirror shall be protected by full size shock-absorbing water-resistant filler and full size one piece N^o20 gauge corrosion protected steel. A N^o18 gauge corrosion protected steel 'H' bracket shall be supplied with all required mounting hardware. Mirror shall be secured to vertical bracket with allen head locking screws.

Inter-Lok Stainless Steel Framed Mirror shall be Model N^o 0600-__ (insert glazing option) as fabricated by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

MATERIALS

- Frame:** 18-8, type 304, N^o18 gauge (.048 in. [1.2mm] thick) stainless steel. Unitized all welded construction. Exposed surfaces have satin finish. Edges and corners are burr free.
- Glass:** Standard - A glazing is N^o1 quality, 1/4" inch (6.4mm) thick plate/float, silver coated and hermetically sealed with a uniform coating of copper plating, and warranted against silver spoilage for 15 years. Mirrors meet Federal Spec DD-M-411C, ASTM C-1036-91.
- Filler:** Expanded polyethylene microcell foam sheet material, abrasion resistant and shock absorbing, water resistant, 1/8" inch (3.2mm) total layer thickness.

INSTALLATION

Install bracket level and plumb as per diagram location using N^o10 self tapping screws (supplied). Hang mirror on bracket and tighten locking screws at top & bottom. For compliance with ADA Accessibility Guidelines, bottom edge of reflecting surface should be no higher than 40" (1016 mm) above finished floor.

GLAZING OPTIONS

Units are supplied with 1/4" thick plate glass mirrors as designated by the -A suffix standard. Other glazing options are available. For a complete description see the **MIRROR GLAZING OPTIONS** chart.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.